

T300 MAXIMUM SECURITY HEAVY DUTY DEADBOLTS
FOR COMMERCIAL AND RESIDENTIAL APPLICATIONS

MEETS
The Buy American Act


Meets ADA requirements
Specially designed for
Barrier Free Application
Exceeds BHMA/ ANSI A156.2
Series 4000, Grade 2 requirements




3 HOUR FIRE RATED
UL10C, UBC 7-2-1997

1" (25mm) throw high-strength
steel alloy deadbolt with
anti-saw pin


Sturdy, all steel latch
case and mechanism

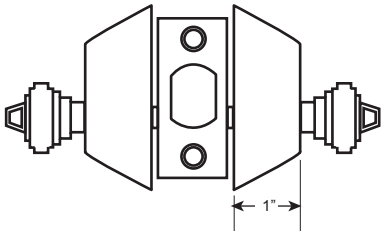

**T362 SERIES
DOUBLE CYLINDER**

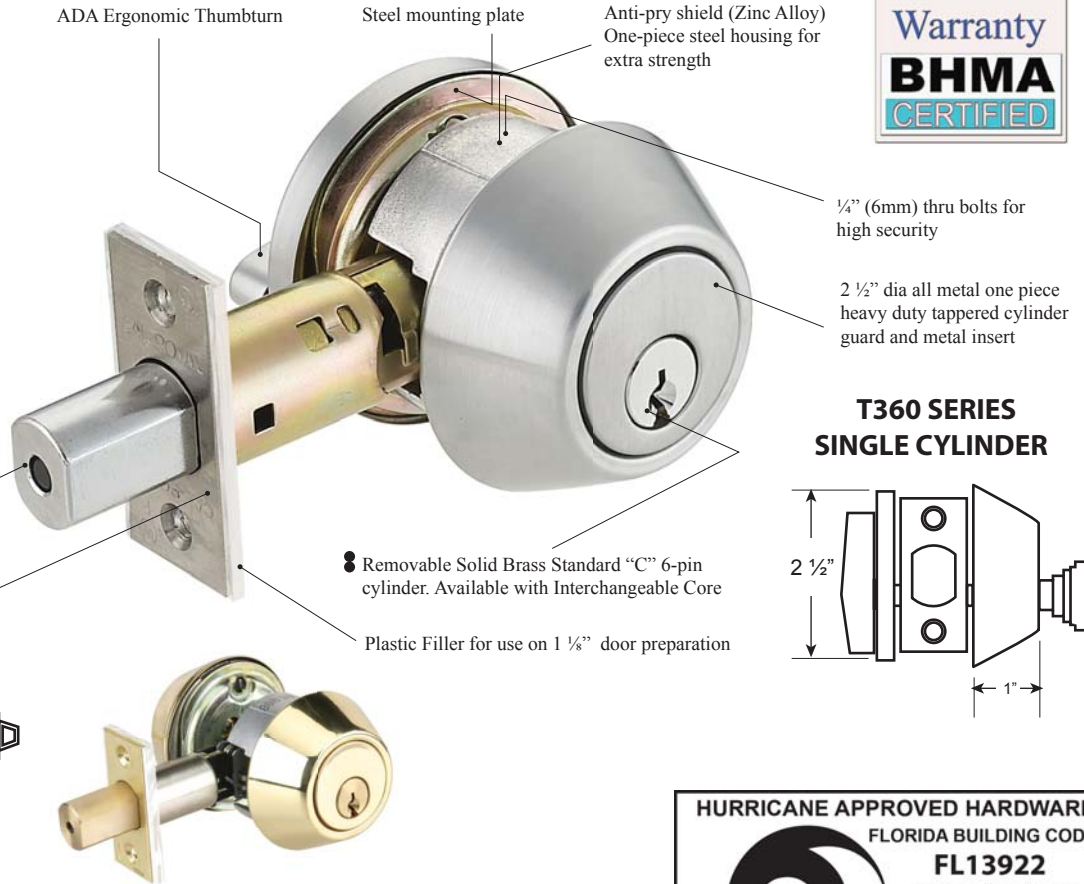

**T360 SERIES
SINGLE CYLINDER**



CONFIGURATION	MAX FRAME DIMENSIONS	DESIGN PRESSURE (PSF)	
		INSWING/OUTSWING POSITIVE	INSWING/OUTSWING NEGATIVE
SINGLE	40" x 88"	+55.0	-55.0
DOUBLE	76" x 88"	+55.0	-55.0

HURRICANE APPROVED HARDWARE
FLORIDA BUILDING CODE:
FL13922
ASTM E1886/E1996
ASTM E330
TAS 201, 202, 203
UL10B
UL10C

SPECIFICATIONS

TRIM
Wrought Brass or Stainless Steel.

DOOR RANGES
Adjustable 1 3/8" (35mm) to 1 3/4" (45mm) door thickness.
Optional 2 1/4" thick doors. Specify conversion kit for single (CONV T360) or double (CONV T362) Cylinder.

BACKSET
Adjustable UL Listed 3 Hour Fire Rating 2 3/8" or 2 3/4" latchbolt.

DEADBOLT FACEPLATE
Standard 2 1/4" X 1" packed with 1/8" plastic filler to convert 1" face plate to 1 1/8" wide door preparations.

BORE DIAMETER
1" for latch, 2 1/8" for lock housing.

KEYWAYS
6 pin solid brass "C" keyway standard. Schlage E, Schlage C-K, Russwin D1-2-3-4, Corbin 59/60, Sargent LA-LB-LC, Falcon/Weiser E, Arrow A, Yale 8, Yale GA and Kwikset. Can also accept Medeco, Assa, Kaba and Cal-Royal (HSK) High Security Cylinders.

INTERCHANGEABLE CORE
Interchangeable Core locks will accept compatible 6 or 7 pin cores with Best, Falcon and Arrow. Prefix "IC" before part number. Available combined or uncombined. Temporary construction cores available. Factory keying with control key and masterkey available.


STRIKE
1 1/8" X 2 3/4" square corner. Extra security 1" throw bolt with 1/4" free spinning anti-cut through pin. 3" screws with wood frame reinforcer greatly strengthens door frames.

T300 SERIES FINISHES AND FUNCTIONS



FINISHES AVAILABLE		
BHMA SYMBOL	US CODE	DESCRIPTION
605	US3	Polished Brass
606	US4	Satin Brass
609	US5	Antique Brass
612	US10	Satin Bronze
613	US10B	Oil Rubbed Bronze
619	US15	Satin Nickel
625	US26	Bright Chrome
626	US26D	Satin Chrome


Refer to price list for stock finishes and functions

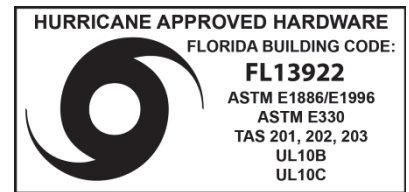


CONFIGURATION	MAX FRAME DIMENSIONS	DESIGN PRESSURE (PSF) INSWING/OUTSWING	
		POSITIVE	NEGATIVE
SINGLE	40" x 88"	+55.0	-55.0
DOUBLE	76" x 88"	+55.0	-55.0



Heavy Duty Single Cylinder Deadbolt
Deadbolt thrown or retracted by key from outside or by inside turn unit. Bolt automatically deadlocks when fully thrown.



Heavy Duty Double Cylinder Deadbolt
Deadbolt thrown or retracted by key from either side. Bolt automatically deadlocks when fully thrown.



Classroom Deadbolt Lock
Deadbolt thrown or retracted by key outside. Inside turn unit will retract bolt only. Bolt automatically deadlocks when fully thrown.



One Way Dead Bolt WITH INTERNAL PLATE
Deadbolt thrown or retracted by key only. Bolt automatically deadlocks when fully thrown. Blank plate inside (exposed screws).



One Sided Dead Bolt
Deadbolt thrown or retracted by turn unit only. No outside trim. Bore halfway through door for installation visible from one side of door only.



One Sided Dead Bolt WITH EXTERNAL PLATE
Deadbolt thrown or retracted by turn unit only. Blank plate is on external trim to be used on bore holes 2 3/4" wide.

OTHER FUNCTIONS NOT LISTED AVAILABLE UPON REQUEST

"IC" Indicates functions available with Interchangeable Core compatible with 6 or 7 pin cores by Best, Falcon and Arrow.