

Available with Interchangeable Core

MEETS
The Buy American Act

Meets ADA requirements
Specially designed for
Barrier Free Application
Conforms with ANSI A156.2
Series 4000, Grade 2
Exceeds 400,000 cycles

HURRICANE APPROVED HARDWARE
FLORIDA BUILDING CODE:
FL13922
ASTM E1886/E1996
ASTM E330
TAS 201, 202, 203
UL10B
UL10C

Optional tactile warning meets
handicap and fire code

Push in and
turn button
function


Coil compression
springs provide great
strength and durability

UL LISTED 3 HOUR
RATED 1/2" Throw
deadlatch completely
reversible for flat &
beveled doors

PIONEER
SL SERIES (NON CLUTCH MECHANISM)
CSL SERIES (CLUTCH MECHANISM)
OPTIONAL THRU BOLT INSTALLATION






3 HOUR FIRE RATED
UL10C, UBC 7-2-1997

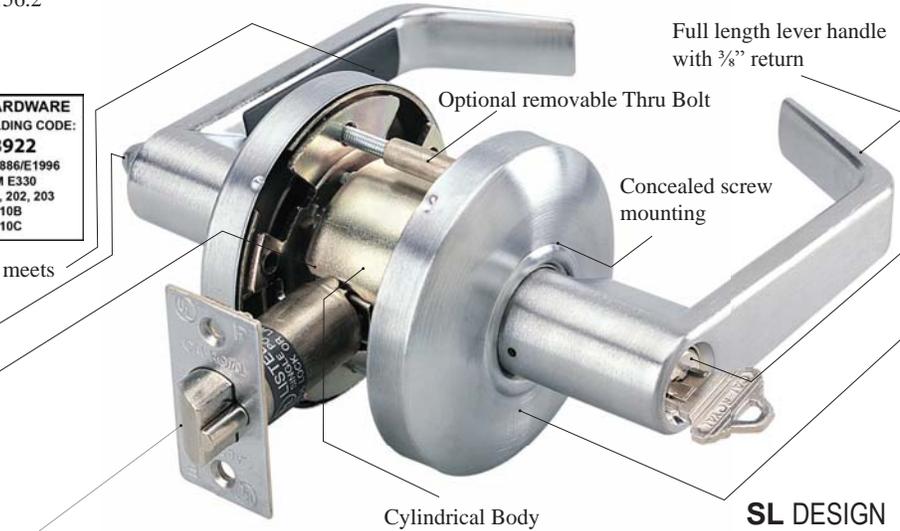

Solid brass 6 pin "C"
keyway cylinder. Available
with Interchangeable Core

Individual spring on each
side to prevent lever sag,
maintain reliability and
reduce maintenance



SPECIFICATIONS

APPLICATIONS

For offices, schools, hospitals, apartments, hotel/motel, residential, commercial and public buildings.

DOOR RANGES

1 3/8" to 1 3/4" thickness doors.

BACKSET

2 3/4" Standard, 2 3/8", 3 3/4" and 5" optional.

LATCH FACEPLATE

2 1/4" x 1 1/8", adjustable for flat or beveled doors 1/8" in 2", for 2 3/4" backset. Optional 2 1/4" x 1" for 2 3/8" backset.

LATCHBOLT

1/2" Throw solid brass, reversible for RH or LH applications. UL Listed.

ANSI STANDARDS

Meets or exceeds requirements of BHMA/ANSI A156.2 Series 4000, Grade 2 (FF-H 106C), 400,000 cycles.

EXPOSED TRIM

Wrought brass, bronze or stainless steel, levers are Zinc casting, plated to match trim finish.

KEYING

6-pin "C" keyway cylinder, 2 keys per lock. Keying as per individual job requirement.

CYLINDER & KEYWAYS

6 pin solid brass "C" keyway standard. Schlage E, Schlage C-K, Russwin D1-2-3-4, Corbin 59/60, Corbin-Russwin L4, Sargent LA-LB-LC, Falcon/Weiser E, Arrow A, Yale 8, Yale GA and Kwikset. Can also accept Medeco, Assa, Kaba and Cal-Royal (HSK) High Security Cylinders.

CLUTCH

Clutch available on all keyed locks and privacy functions. Prefix "C" before part number.

Tactile & Lead Lining available upon request.

INTERCHANGEABLE CORE

Interchangeable Core locks will accept compatible 6 or 7 pin cores with BEST, FALCON and ARROW. Prefix "IC" before part number. Available combined or uncombined Temporary construction cores available. Factory keying with control key and masterkey available.

STRIKES: ASA strike standard, "T" and full lip strike available on request.



PIONEER SL SERIES FINISHES AND FUNCTIONS



FINISHES AVAILABLE		
BHMA SYMBOL	US CODE	DESCRIPTION
605	US3	Polished Brass
606	US4	Satin Brass
609	US5	Antique Brass
612	US10	Satin Bronze
613	US10B	Oil Rubbed Bronze
619	US15	Satin Nickel
625	US26	Polished Chrome
626	US26D	Satin Chrome


Refer to price list for stock finishes and functions

DOOR PREPARATION

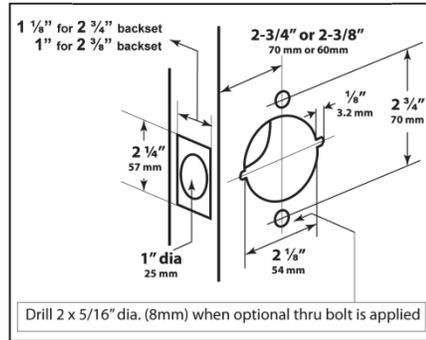


ENTRANCE/OFFICE LOCK

Turn/Push button locking. Pushing and turning button locks outside lever requiring use of key until button is manually unlocked. Pushing button locks outside lever until unlocked with key or inside lever is turned.




ENTRANCE LOCK PUSH BUTTON

Pushing button in inside lever locks outside lever. Turning inside lever or operating key in outside lever releases button automatically. Closing door does not release button. Button cannot be fixed in lock position. Inside lever always free. Latch bolt automatically deadlocks when door is closed.



CLASSROOM LOCK

Deadlocking latch bolt operated by lever from either side except when outside lever is locked from outside by key. When outside lever is locked, latch bolt is operated by turning inside lever.




STOREROOM LOCK

Deadlocking latch bolt operated by key in outside lever or by rotating inside lever. Outside lever is always fixed.



EXIT LOCK CONNECTING ROOM WITH KEY

Deadlocking latch bolt operated with key from inside only. Blank plate outside.




DORMITORY/ASSISTED LIVING

Deadlocking latch bolt operated by lever from either side except when outside lever is locked by key or by push button on inside lever. Key in outside lever locks or unlocks outside lever. Outside key releases push button when locked from inside. Rotating inside lever or closing the door releases push button.




PATIO

Deadlocking latch bolt operated by lever from either side. Outside lever is locked by push button inside and unlocked by rotating inside lever or closing door.



PRIVACY LOCK

Latch bolt operated by lever from either side. Outside lever is locked by push button inside and unlocked by emergency release outside. Turning inside lever or closing door releases push button.



PASSAGE SET

Latch bolt operated by lever from either side at all times.



DUMMY LEVER

Single dummy trim for one side of door. Pull only.



EXIT LOCK

Blank plate outside. Inside lever always unlocked.

HOW TO ORDER:
For "AG" or "RL" designs, replace design name.
Example: SL00 entrance in "AG" is AG00.

Ⓜ "IC" Indicates function available with BEST, FALCON & ARROW Interchangeable Core.

"CSL" Indicates function available with clutch

OTHER FUNCTIONS NOT LISTED AVAILABLE UPON REQUEST